


## SITE PLANNING DATA, LIEBERT® SERIES 610™, 225KVA, SINGLE-MODULE SYSTEMS

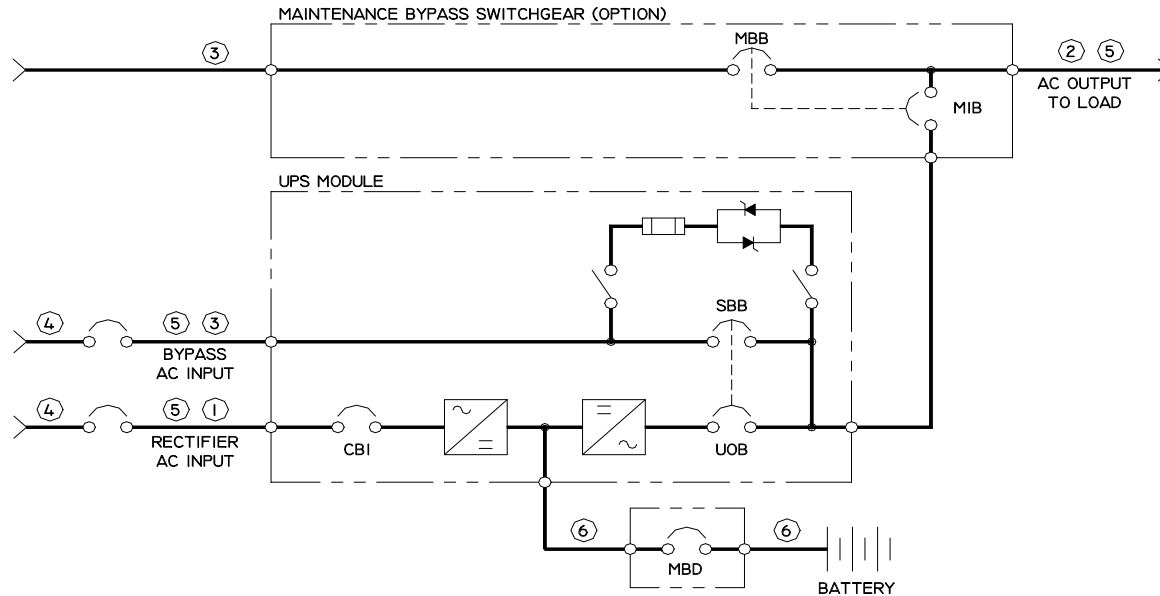

### Notes for Table 1

- Nominal rectifier AC input current (considered continuous) is based on full rated output load. Maximum current includes nominal input current and maximum battery recharge current (considered noncontinuous). Continuous and noncontinuous current limits are defined in NEC 100. Maximum input current is controlled by current limit setting which is adjustable. Values shown for maximum setting are 125% of nominal input current. Standard factory setting is 115%.
- Nominal AC output current (considered continuous) is based on full rated output load. Maximum current includes nominal output current and overload current for 10 minutes.
- Bypass AC input current (considered continuous) is based on full rated output load.
- Feeder protection (by others in external equipment) for rectifier AC input and bypass AC input is recommended to be provided by separate overcurrent protection devices.
- UPS output load cables must be run in separate conduit from input cables.
- Power cable from module DC bus to battery should be sized for a total maximum 2.0 volt line drop (power cable drop plus return cable drop as measured at the module) at maximum discharge current.
- Grounding conductors to be sized per NEC 250-122. Neutral conductors to be sized for full capacity—per NEC 310-15 (b)(4)—for systems with 4-wire loads and half capacity for systems with 3-wire loads.
- Rectifier AC Input: 3-phase, 3-wire, plus ground  
AC Output to Load: 3-phase, 3- or 4-wire, plus ground  
Bypass AC Input: 3-phase, 3- or 4-wire, plus ground  
Module DC Input from Battery: 2-wire (positive and negative), plus ground
- All wiring is to be in accordance with National and Local Electrical Codes.
- Minimum overhead clearance is 2 ft. (0.6m) above the UPS.
- Top and bottom cable entry through removable access plates on standard size cabinets only. Top cable entry only on SpaceSaver cabinets, which are 8" (20cm) narrower than standard size cabinets. SpaceSaver cabinets are available on units that have either 600 or 480VAC output. Cut access plates to suit conduit size.
- Control wiring and power cables must be run in separate conduits. Control wiring must be stranded tinned conductors.
- 7% maximum reflected input harmonic current and 0.92 lagging input power factor at full load with optional input filter.



**Table 1 Site planning data - Liebert Series 610, 225kVA, Single-Module Systems**

UPS Rating		AC Output Voltage	Options		Rectifier AC Input Current		Inverter or Bypass AC Output Current		Required Battery Disconnect Rating (A)	Max. Battery Current at End of Discharge (A)	Max. Heat Dissipation Full Load BTU/h (kW)	Dimensions WxDxH: in. (mm)		Approx. Weight Unpacked lb. (kg)		Floor Loading Concentrated Loading lb./ft. <sup>2</sup> (kg/m <sup>2</sup> )		
kVA	kW	VAC	Input Filter	Input Xformer	Nom	Max	Nom	Max				Standard Model/ SpaceSaver	Standard Model	Space-Saver	Standard Model	Space-Saver		
<b>600V input</b>																		
225	180	600	No	No	218	272	217	271	450	486	42,700 (12.5)	Standard: 56x33x78 (1422x838x1981)	3460 (1569)	3260 (1479)	270 (1316)	296 (1447)		
225	180	600	Yes	No	202	253	217	271	450	486	44,800 (13.1)		3590 (1628)	3390 (1538)	280 (1366)	308 (1505)		
225	180	600	No	Yes	221	277	217	271	450	486	53,400 (15.6)	SpaceSaver: 48x33x78 (1219x838x1981)	4410 (2000)	4210 (1910)	344 (1678)	383 (1869)		
225	180	600	Yes	Yes	205	257	217	271	450	486	55,600 (16.3)		4540 (2059)	4340 (1969)	354 (1727)	395 (1926)		
225	180	208	No	No	219	274	625	781	450	488	46,250 (13.5)	Standard: 56x33x78 (1422x838x1981)	3660 (1660)	—	285 (1392)	—		
225	180	208	Yes	No	203	254	625	781	450	488	48,400 (14.2)		3790 (1719)	—	295 (1442)	—		
225	180	208	No	Yes	223	278	625	781	450	488	57,050 (16.7)		4610 (2091)	—	359 (1754)	—		
225	180	208	Yes	Yes	206	258	625	781	450	488	59,300 (17.4)		4740 (2150)	—	369 (1803)	—		
<b>480V input</b>																		
225	180	480	No	No	271	339	271	338	450	486	39,200 (11.5)	Standard: 56x33x78 (1422x838x1981)	3190 (1447)	2990 (1356)	249 (1214)	272 (1327)		
225	180	480	Yes	No	251	314	271	338	450	486	41,300 (12.1)		3320 (1506)	3120 (1415)	259 (1263)	284 (1385)		
225	180	480	No	Yes	275	344	271	338	450	486	49,800 (14.6)	SpaceSaver: 48x33x78 (1219x838x1981)	4390 (1991)	4190 (1901)	342 (1670)	381 (1860)		
225	180	480	Yes	Yes	255	319	271	338	450	486	51,950 (15.2)		4520 (2050)	4320 (1960)	352 (1720)	393 (1917)		
225	180	208	No	No	272	341	625	781	450	488	42,700 (12.5)	Standard: 56x33x78 (1422x838x1981)	3475 (1576)	—	271 (1322)	—		
225	180	208	Yes	No	253	316	625	781	450	488	44,800 (13.1)		3605 (1635)	—	281 (1372)	—		
225	180	208	No	Yes	277	346	625	781	450	488	53,400 (15.6)		4675 (2121)	—	364 (1779)	—		
225	180	208	Yes	Yes	257	321	625	781	450	488	55,600 (16.3)		4805 (2180)	—	374 (1828)	—		
<b>208V input</b>																		
225	180	208	No	No	635	794	625	781	450	488	49,800 (14.6)	Standard: 56x33x78 (1422x838x1981)	3870 (1755)	—	302 (1472)	—		
225	180	208	Yes	No	589	736	625	781	450	488	51,950 (15.2)		4000 (1814)	—	312 (1522)	—		
225	180	208	No	Yes	646	807	625	781	450	488	60,750 (17.8)		4510 (2046)	—	351 (1716)	—		
225	180	208	Yes	Yes	599	748	625	781	450	488	63,000 (18.4)		4640 (2105)	—	362 (1765)	—		
<b>See Notes (p. 1):</b>			13	—	1,4,5,7,8,9,12		2,3,5,7,8,9,12		6	6,8,9,12		—	—	—	—	—	—	



© 2005 Liebert Corporation  
 All rights reserved throughout the world. Specifications subject to change without notice.  
 ® Liebert is a registered trademark of Liebert Corporation.  
 All names referred to are trademarks or registered trademarks of their respective owners.  
 SL-25121\_REV2\_09-10

**Technical Support / Service**  
 800-543-2378  
 powertech@emersonnetworkpower.com  
**Web site:** www.liebert.com

**United States**  
 1050 Dearborn Drive  
 P.O. Box 29186  
 Columbus, OH 43229