

### Specification

Nominal Voltage	12V	
Nominal Capacity(20HR)	10.5AH	
Dimensions	Length	151 ± 2mm (5.95 inches)
	Width	65 ± 1mm (2.56 inches)
	Container Height	111 ± 2mm (4.37 inches)
	Total Height (with Terminal)	117 ± 2mm (4.61 inches)
Approx Weight	Approx 3.20 kg (7.06lbs)	
Terminal	T2	
Container Material	ABS	
Rated Capacity	10.5 AH/0.525A	(20hr, 1.80V/cell, 25°C/77°F)
	9.77 AH/0.977A	(10hr, 1.80V/cell, 25°C/77°F)
	8.95 AH/1.790A	(5hr, 1.75V/cell, 25°C/77°F)
	8.04 AH/2.680A	(3hr, 1.75V/cell, 25°C/77°F)
	6.59 AH/6.590A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	150A (5s)	
Internal Resistance	Approx 22mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
Cycle Use	Initial Charging Current less than 3.0A. Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	GRUBER 58AGPS series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



### Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	20.0	15.4	12.7	11.0	8.50	6.26	5.28	3.12	2.44	1.99	1.62	1.41	1.133	0.947	0.520
1.80V/cell	26.8	19.6	15.4	13.0	10.03	7.29	5.91	3.41	2.63	2.12	1.74	1.51	1.202	0.977	0.525
1.75V/cell	30.3	21.6	16.8	14.0	10.42	7.56	6.19	3.53	2.68	2.17	1.79	1.55	1.223	1.003	0.530
1.70V/cell	33.3	23.5	17.9	14.7	10.8	7.86	6.38	3.62	2.75	2.23	1.83	1.58	1.240	1.023	0.540
1.65V/cell	36.7	25.4	19.1	15.6	11.4	8.06	6.53	3.68	2.87	2.30	1.88	1.62	1.260	1.044	0.547
1.60V/cell	40.5	27.5	20.4	16.6	12.1	8.40	6.59	3.83	2.96	2.38	1.94	1.65	1.272	1.055	0.550


### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	36.6	28.4	23.7	20.7	16.2	12.0	10.19	6.06	4.76	3.88	3.18	2.76	2.24	1.87	1.030
1.80V/cell	48.6	35.8	28.3	24.1	18.8	13.9	11.3	6.57	5.10	4.12	3.39	2.95	2.37	1.93	1.038
1.75V/cell	53.6	38.7	30.5	25.7	19.4	14.3	11.8	6.79	5.17	4.20	3.47	3.02	2.40	1.98	1.048
1.70V/cell	57.4	41.3	32.1	26.8	20.1	14.8	12.2	6.95	5.30	4.31	3.55	3.08	2.43	2.02	1.066
1.65V/cell	62.4	44.1	33.9	28.3	21.0	15.0	12.3	7.01	5.51	4.44	3.64	3.14	2.47	2.06	1.079
1.60V/cell	67.2	46.8	35.7	29.8	22.0	15.6	12.4	7.27	5.65	4.56	3.75	3.20	2.48	2.07	1.083


# Dimensions

## T2 Terminal


Unit: mm [inches]

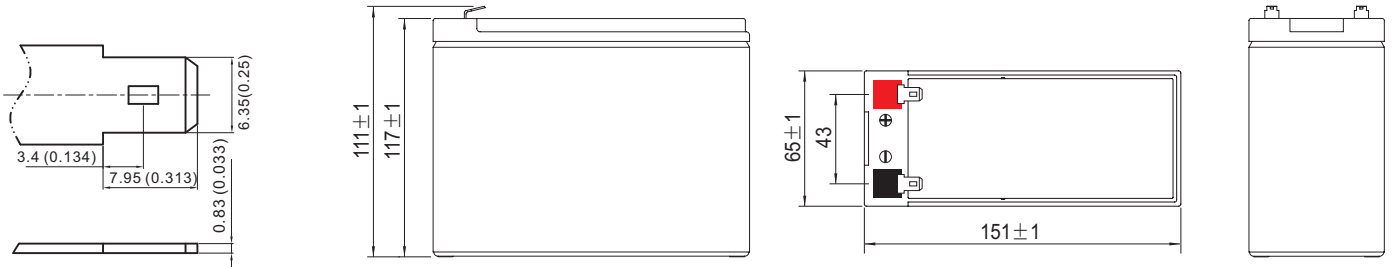


## Discharge Characteristics

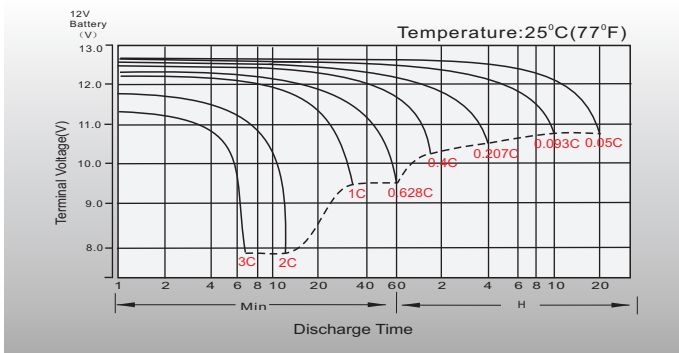


## Float Charging Characteristics

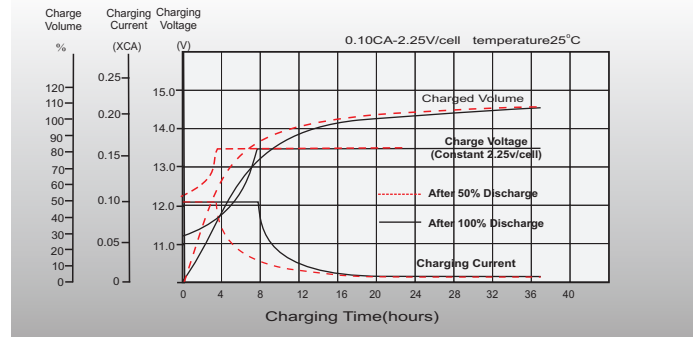


## Temperature Effects in Relation to Battery Capacity

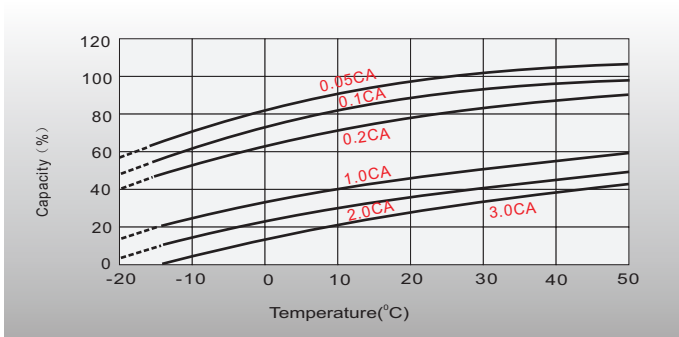


## Effect of Temperature on Long Term Float Life

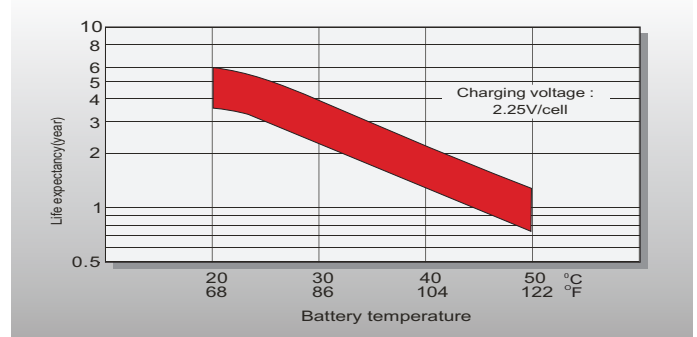

## Cycle Life in Relation to Depth of Discharge

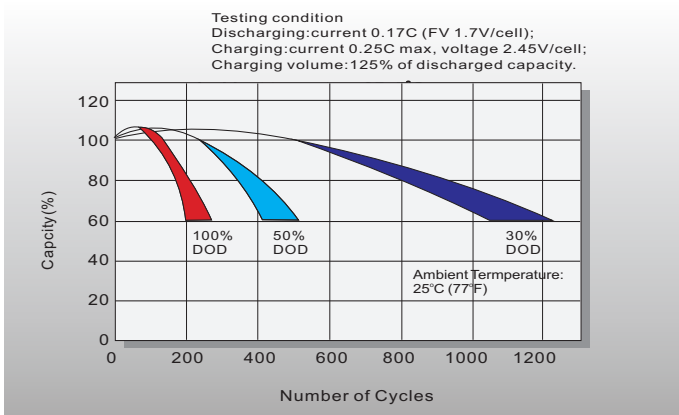

## Self Discharge Characteristics

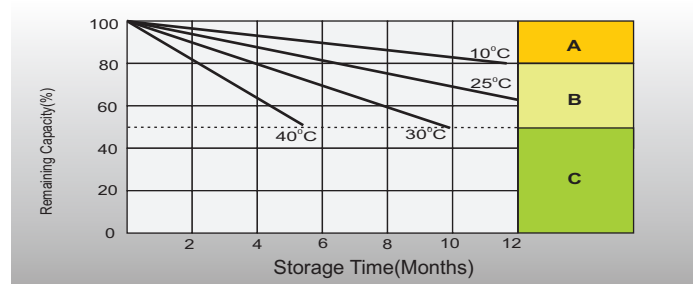

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.